

# Tangential knife (Oscillating knife) control in myCNC

myCNC software has built-in features for tangential knife control.

## What is Tangential control in myCNC

Tangential knife control activated if the value of "1" is written into Global variable #7005.

In this case, input g-code file is modified automatically to support tangential knife:


1. Positioning blocks (G0-code) is modified. CNC Control software looks at the next motion code, calculates motion direction angle and add C-axis rotation into the G0 code to follow the next motion.
2. For Arc interpolation codes (G2, G3) - CNC control add C-axis rotation to follow motion direction
3. For Linear interpolation (G1 code) - CNC control calculates an angle between two line segments and
  1. If the angle less than **Knife Min Angle**, then C-axis rotation built-in into the G1 line to follow motion direction on smooth curves.
  2. else If the angle less than **Knife Min Angle (2)** , then C-axis rotation is added between the lines and made in the material
  3. else Lift up, C-axis rotation and Move Down is added between the lines to handle sharp corners.

All this control is performed automatically if global variable #7005 is set to "1".

There are many possible ways to set the variable and have tangential control enabled permanently or switched on-off on-the-fly (for example if switching between Spindle, Marker and tangential nife in G-code program)

## How to enable Tangential Control permanently

It's possible to set the variable #7005 by checking a "Knife Enabled" checkbox in "Tangential Knife" configuration widget.

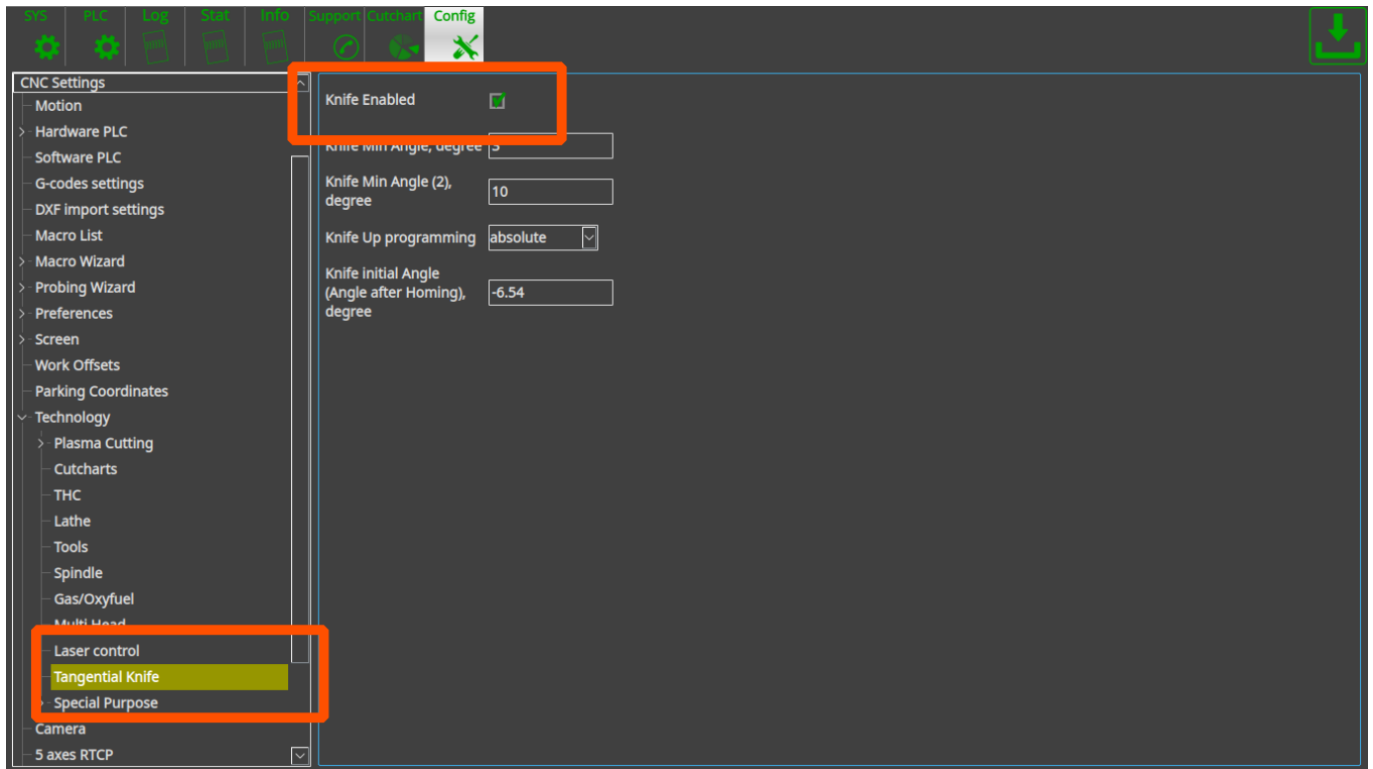

The #7005 variable can be set in Software PLC, "HANDLER\_INIT.plc".

Software PLC procedure HANDLER\_INIT is running at the start of myCNC control software right after a complete configuration sent to the controller.

It's very easy to add a line to set the variable 7005 -

```
gvarset(7005,1);
```

For example

[\\_HANDLER\\_INIT.plc](#)

```
main()
{
    gvarset(60000,1); //run Servo ON procedure
    gvarset(7005,1);  //Enable Tangential Knife control
    exit(99);
};
```

PLC

Config

CNC Settings

Motion

Hardware PLC

Software PLC

G-codes settings

Macro List

Macro Wizard

Probing Wizard

Preferences

Screen

Work Offsets

Parking Coordinates

Technology

Plasma Cutting

Cutcharts

THC

Lathe

Tools

Spindle

Gas/Oxyfuel

Multi Head

Laser control

Tangential Knife

Special Purpose

Camera

5 axes RTCP

PLC Sources

\_BV17

\_HANDLER\_EXIT

\_HANDLER\_GCODE\_START

\_HANDLER\_GCODE\_STOP

\_HANDLER\_INIT

PLC Includes

func.h

Name: 

\_HANDLER\_INIT

Aliases:

main()

{

gvarset(60000,1); //run Servo ON procedure

gvarset(7005,1); //Enable Tangential Knife control

exit(99);

};


BV17: OK

HANDLER\_EXIT: OK

HANDLER\_GCODE\_START: OK

HANDLER\_GCODE\_STOP: OK

HANDLER\_INIT: OK

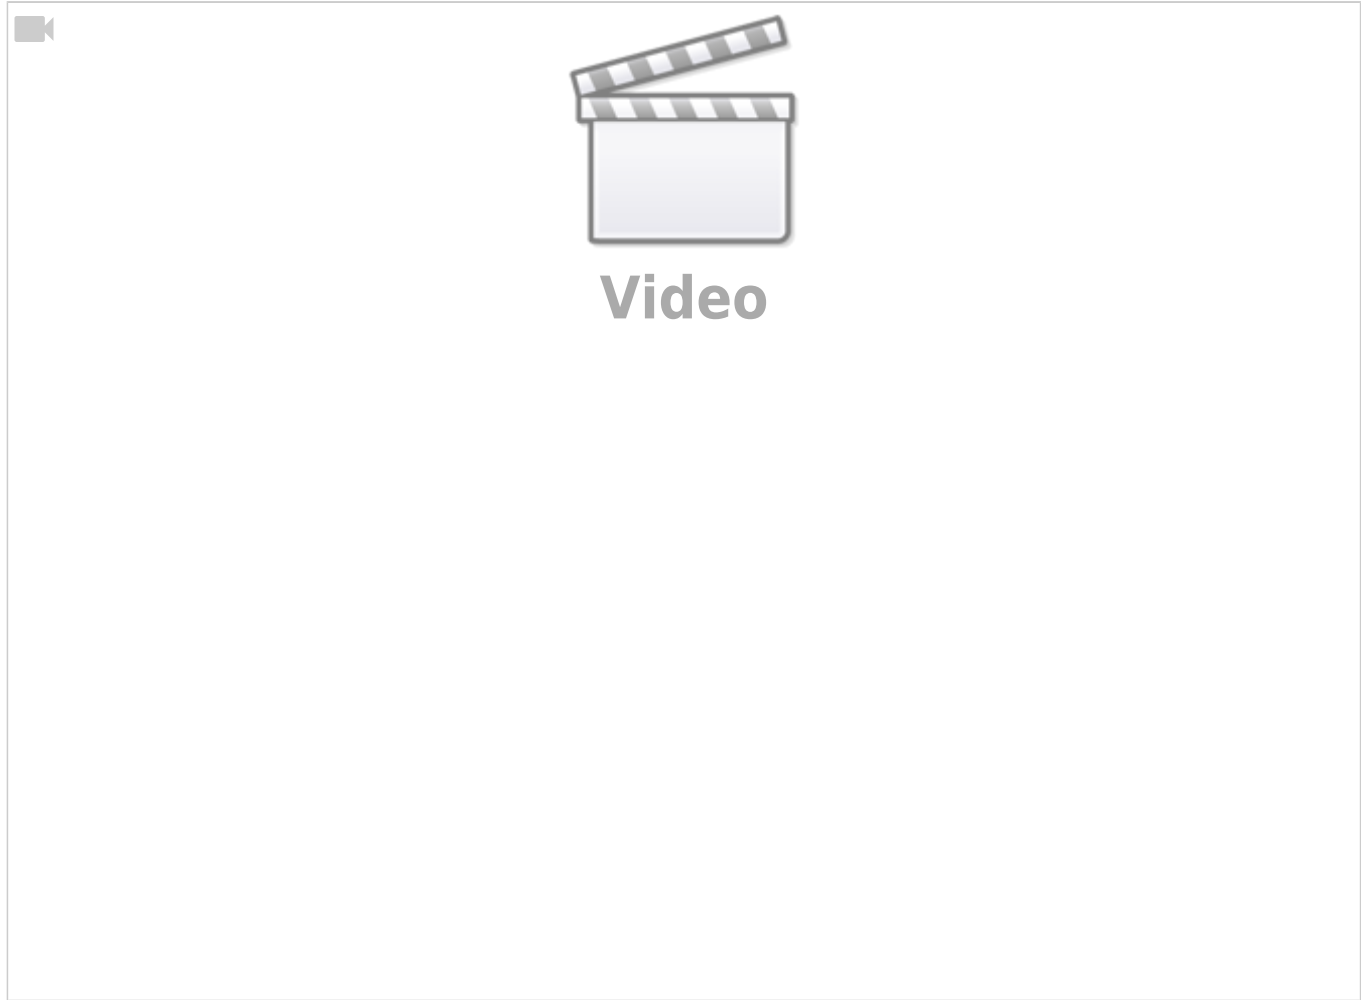

From:

<http://cnc42.com/> - **myCNC Online Documentation**

Permanent link:

[http://cnc42.com/mycnc/tangential\\_knife\\_support?rev=1535506797](http://cnc42.com/mycnc/tangential_knife_support?rev=1535506797)

Last update: **2018/08/28 21:39**

